
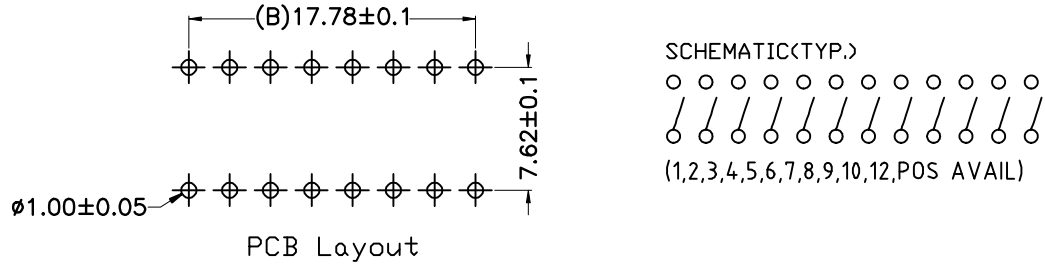



1		2		3		4		5		6	
PRODUCT NO.	RoHS compliant							REV.	ECN NO.	DR	DATE
DSWBxxLHGET											

Note:

- All dimensions are in millimeters.
- General tolerance: $\pm 0.2\text{mm}$.
- Material:
 - Base: UL94V-0 PBT Thermoplastic (Black).
 - Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
 - Actuators: UL94V-0 PA66 Thermoplastic (White).
 - Contact plating: Gold plating over nickel.
 - Pitting material: Epoxy.
- Electrical
 - Electrical: 2000 Operations per switch 24/VDC, 25mA.
 - Non-Switching Rating: 100mA, 50/VDC.
 - Switching Rating: 25mA, 24/VDC
 - Contact Resistance: 100 m Ω Max. at initial.
- Mechanical
 - Mechanical life: 2000 Operations per switch.
 - Stroke: 2.0mm.
 - Operation Temp: -20°C to 70°C.
 - Storage Temp: -40°C to 85°C.

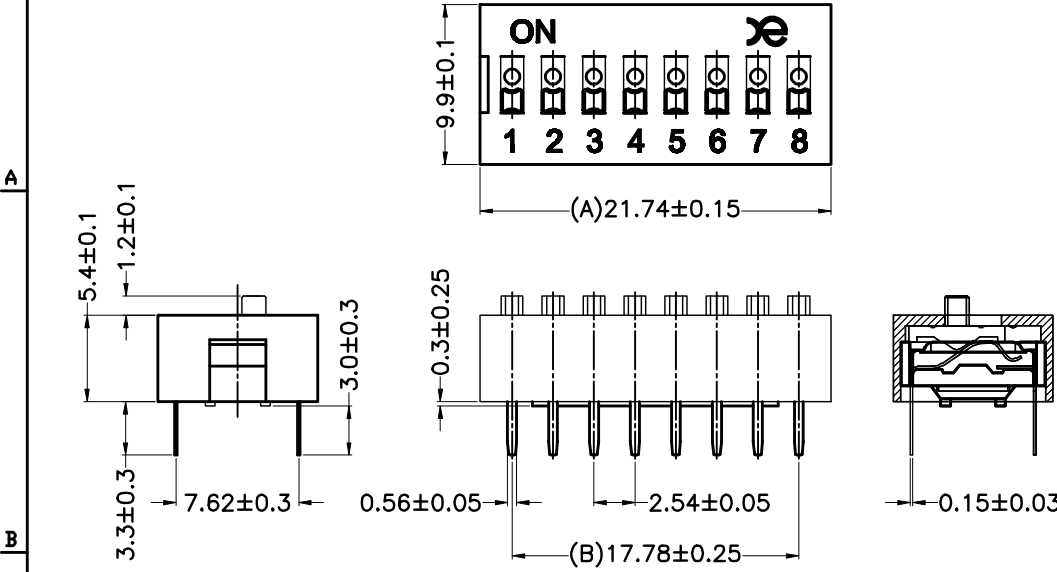

6. PART NUMBER DESCRIPTION:

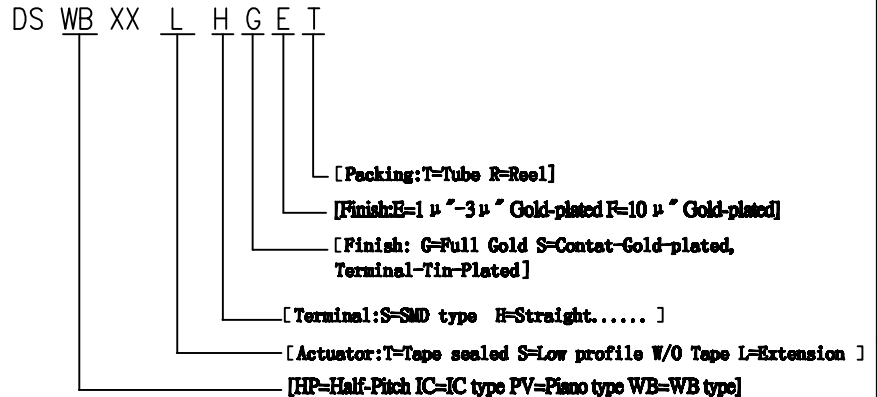

PROD. NO.	NO. OF POS.	DIM. A	DIM. B	PROD. NO.	NO. OF POS.	DIM. A	DIM. B
DSWB02LHGET	2	6.50	2.54	DSWB08LHGET	8	21.74	17.78
DSWB03LHGET	3	9.04	5.08	DSWB09LHGET	9	24.28	20.32
DSWB04LHGET	4	11.58	7.62	DSWB10LHGET	10	26.82	22.86
DSWB05LHGET	5	14.12	10.16	DSWB11LHGET	11	29.36	25.40
DSWB06LHGET	6	16.66	12.70	DSWB12LHGET	12	31.90	27.94
DSWB07LHGET	7	19.20	15.24				

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY		
LINER	ANGLES	PROJECTION		
.0 ± 0.30	0. ± 1'			TITLE
.00 ± 0.20	.0 ± 0.5'			BY DSWB SERIES PITCH 2.54mm
.000± 0.10	.00±			PRODUCT FAMILY DSWB SERIES
DESIGN	LU ER XIN	2013/07/02		PRAT NO. DSWBxxLHGET
DRAWING				FILE NO. DSWBxxLHGET-A
CHECK				SIZE UNIT SCALE SHEET REV.
APPRO.				A4 mm FIT 1 OF 1 A