



2.54mm单排直针、双排直针

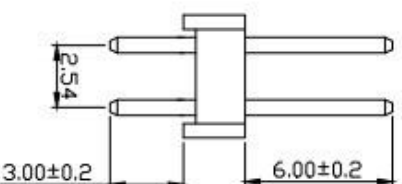

SPECIFICATIONS

- Current Rating: 3Amps
- Insulation Resistance: 1000M Ω Min
- Contact Resistance: 20M Ω Max
- Withstanding Voltage: AC 1000V
- Operation Temperature: -40° to +105°
- Contact Material: Copper Alloy
- Standard: P6T
- Insulator Material: Polyester (UL 94V-0)
- Contact Plating: Gold Flash
- Max. Processing Temp: 240° C for 30-60seconds
(260° C for 5seconds)

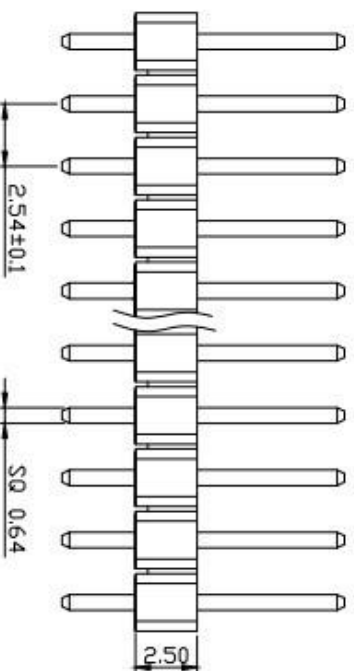